

# RECESSED SLIM PANEL LIGHT

**BIS**  
APPROVED  
DRIVER

**SURGE**  
PROTECTION  
UPTO 2.5 kV

**45K**  
Hours  
LIFE EXPECTANCY

**2Years**  
WARRANTY

**85%**  
ENERGY  
SAVING

**FLUCTUATION PROOF**  
Wide Operating Voltage

**Application :**

- Home, Office, Restaurant, Mart, Gallery


**Features:**

- Unique 12 mm Slim Design
- Driver Mounted on the back panel
- Reliable LED's
- No effect of voltage fluctuation
- High Lumen
- Protection from dust & insects







LEAN- 3W

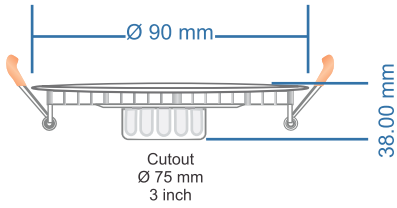


LEAN- 6W

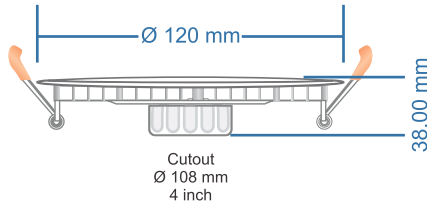


LEAN- 9W

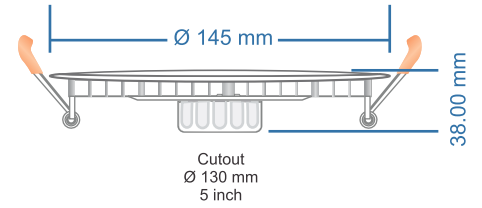


LEAN- 12W

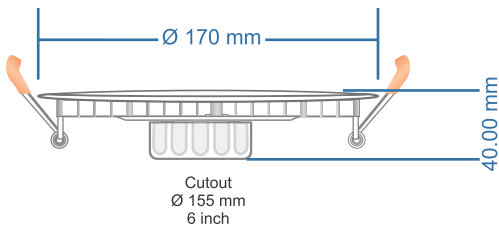

LEAN- 15W

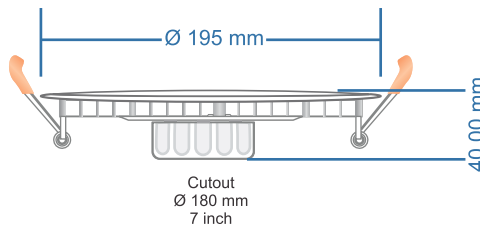

LEAN- 18W

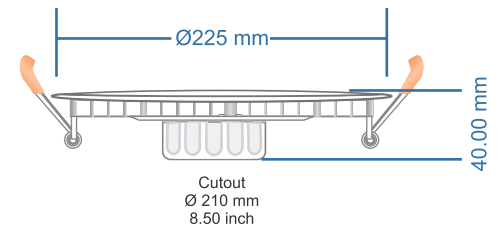

POWER	POWER FACTOR	INPUT VOLTAGE	DIMENSION	COLOR	LUMENS	PART No.
3W	>0.9	100V - 300V	Ø 90 mm	6500K	390	EELERDW3C031
				3000K	330	EELERDW3W033
6W	>0.9	100V - 300V	Ø 120 mm	6500K	780	EELERDW6C034
				3000K	660	EELERDW6W036
9W	>0.9	100V - 300V	Ø 145 mm	6500K	1170	EELERDW9C037
				3000K	990	EELERDW9W039
12W	>0.9	100V - 300V	Ø 170 mm	6500K	1560	EELERDW12C040
				3000K	1320	EELERDW12W042
15W	>0.9	100V - 300V	Ø 195 mm	6500K	1950	EELERDW15C043
				3000K	1650	EELERDW15W045
18W	>0.9	100V - 300V	Ø 225 mm	6500K	2340	EELERDW18C046
				3000K	1980	EELERDW18W048